
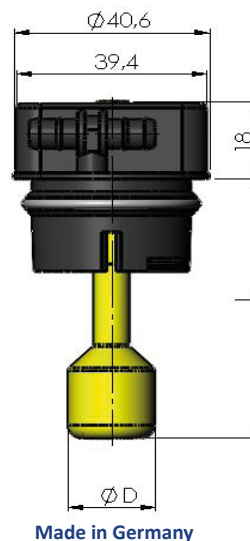


PI 02/2020


HSYS Battery Watering Cell

application traction batteries
area:


hight: 18 mm
assembly deep: min. 44 mm
float way: 4 mm

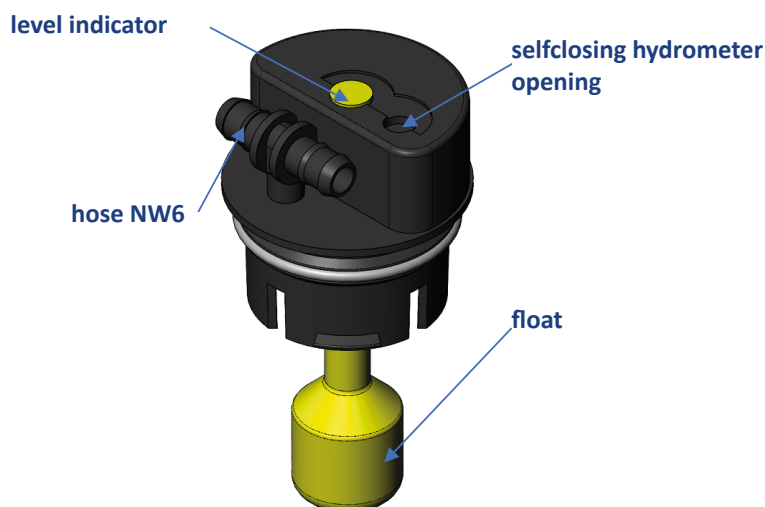

cell opening size 35mm			
article no.	colour	size	float protection
4513500001	black	35 mm	no
4513500004	blue	35 mm	no

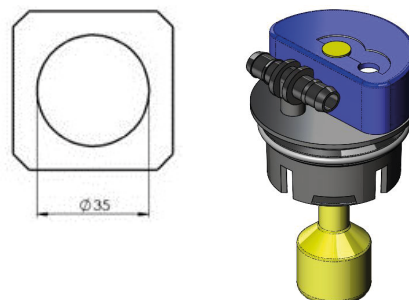

float 18mm			
article no.	colour	length	diameter
4500014800	green	48	18
4500015200	black	52	18
4500015600	grey	56	18
4500016000	yellow	60	18
4500016600	blue	66	18

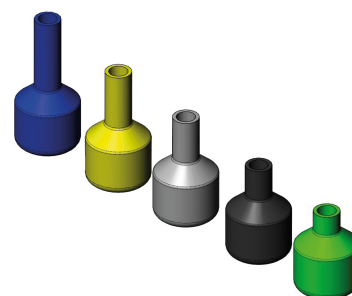

Our company is certified according to DIN EN ISO 9001.

For more information please visit our homepage or contact us directly.





PI 02/2020

Advantages of HSYS battery watering cell:

➔ Effectiveness

- large gas space
- easy handling
- quick installation
- clampless tubing

➔ Safety

- avoidance of injury from battery acid
- explosion protection, resulting gases become re-cycled through the gas space
- kink-proof hose for a safe filling

➔ Economical

- robust design
- universally applicable
- significant reduction in filling times
- quick installation
- easy handling

➔ Attachments

- gravity tank
- hand pump
- fully-electric filling car
- measuring tube
- uv-resistant hose

Our company is certified according to DIN EN ISO 9001.

For more information please visit our homepage or contact us directly.

